
## Save Money

**Ouick Fit** 

# Cover profile FSA 8100 [U-Clip]

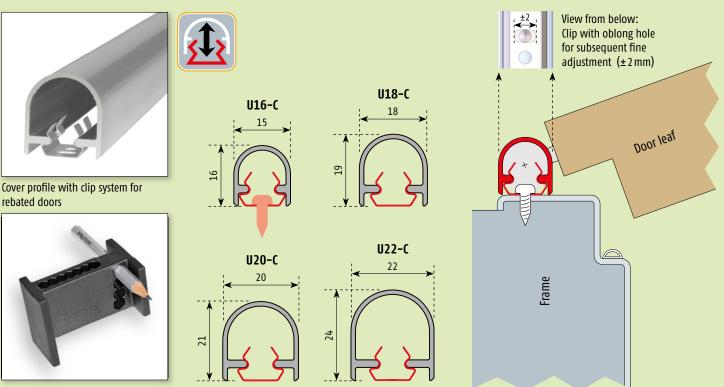

Marking aid

### Key features



- Cover profile for rebated doors
- Quick fit with marking aid
- Concealed clip connection
- Built-in ability to adjust
- Damage-free removal
- Suitable for all hinge diameters

#### **Materials**



## Door types



## Certified quality





Standard length 1	<b>1755 mm</b> , (with 7 clips) for 2 parts, self cut to size (stock length)	11	Adhesive kit U-Clip for
Standard length 2	<b>1980 mm</b> , (with 9 clips) for 3 parts, self cut to size (stock length)		steel frames (see page 35)
Length 3	set per linear metre, cut to size		
Shorten	yes		
Maximum supply length	2500 mm		
Installation set	universal screws and clip included		

Delivery: 1755 | 1980 | made to size: with screws and clips; profile per metre: cover profiles only

#### Article number

F-81xx-xx (xx-xx = variants, see price list)

#### Specification text

**Planet finger protection cover profiles FSA 8100 [U–CLIP]** For safeguarding the hinge side at the secondary closing edge. Hinge side protective profile for rebated doors with a concealed clip fastener of type FSA U–16C / U–18C / U–20C / U–22C (please select). System for damage-free removal and re-attachment of the cover profile. Profile made of aluminium. Standard colour anodised EV1, anodised or powder coated stainless steel, RAI 9016 white or for U18-C also black C35 satin anodised (please select). Safeguarding with profile 1 from FFL to lower edge of lower hinge and profile 2 between the hinges. Or safeguarding with profile 1 from FFL to lower edge of lower hinge, profile 2 between the hinges and profile 3 from upper edge of upper hinge to upper edge of door leaf.

