


# Planet KG-F10 | F12

→ 16,5 x 46 / 52 mm | ↓ 18 mm | ≤ 48 dB



## Main features

- Seal height up to ↓ 18 mm
- Acoustic insulation up to ≤ 48 dB in case of an optimal sealing
- For one and double leaf all-glass doors, with a thickness of 10 and 12 mm
- Planet KG-F10 | F12 to be attached and glued
- Planet drop-down seal cemented in F10 / F12 protection profile
- Unilateral and soundless release, silent seal
- Due to parallel drop-down no trailing on the floor
- Automatic compensation at inclined floors
- High-grade silicone lip, simple lift height adjustment
- Can be shortened up to the next shorter length on stock
- 7 years warranty

## Versions / options

- Planet KG-F10 | F12 → RD ≤ 48 dB, smoke-shielding
- Planet KG-F10 | F12 → FH+RD ≤ 48 dB, fire-retardant and smoke-shielding
- Option bevel lip ≤ 44 dB, up to ↓ 22 mm, for uneven floors
- Special versions on request

## Surfaces

- Protection profile silver anodised EV1
- Protection profile stainless steel satin anodised

## Door types with Planet KG-F10 | F12




## More functions



## Technical specifications

Profile material	aluminum, → 16,5 x 46 / 52 mm, silver anodised EV1 or stainless steel satin anodised
Seal profile	high-grade silicone or high-grade self-extinguishing silicone
Seal height	up to ↓ 18 mm
Sound absorption value	up to ≤ 48 dB at 7 mm space to the floor; up to ≤ 46 dB at 14 mm space to the floor
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths in stock	459, 584, 709, 834, 959, 1084, 1209, 1334, 1459 mm
Special lengths	on request up to 6000 mm, sliding doors up to 1600 mm
Release	unilaterally on hinge side
Can be shortened	up to the maximum of 125 mm
Fastening	to be glued
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

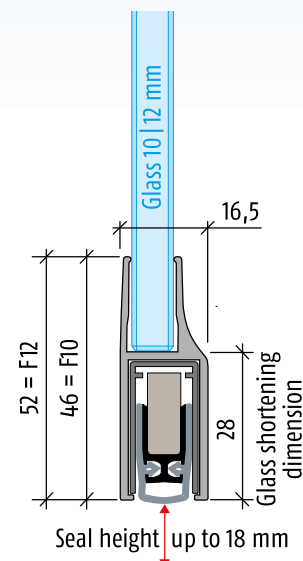



Planet KG-F10 | F12, with cover plate



Planet KG-F10 | F12, attached and glued, release side



Planet KG-F10 | F12, attached and glued



**Option:** Planet KG-F10 | F12, bevel lip for **uneven floors**



**Accessories:** Planet frame protector plate, type 1 (stainless), 20 x 20 mm



Set of Planet cover plates Planet KG

## Order specifications

Planet KG-F10   F12 → RD ≤ 48 dB → silver anodised EV1 incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-F10   F12*
Planet KG-F10   F12 → FH+RD ≤ 48 dB → silver anodised EV1 incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-F10   F12*
Planet KG-F10   F12 → RD ≤ 48 dB → stainless steel satin anodised incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-F10X   F12X*
Planet KG-F10   F12 → FH+RD ≤ 48 dB → stainless steel satin anodised incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-F10X   F12X*

\* xxx = refer to price list for profile length

## Accessories | Options

Planet frame protector plate type 1 (stainless); possible type 2/3/4/5 → refer to chapter Accessories   Options	Prod. code 900014
Cut the Planet to fix dimension	Prod. code 900225
Set of Planet cover plates Planet KG	Prod. code 900252
Sliding door	Prod. code 900908
Bevel lip (≤ 44 dB, up to ↓ 22 mm) DIN L or DIN R	refer to price list, options/supplements

## Advertising text



### Planet KG-F10 | F12 → RD (smoke-shielding) ≤ 48 dB

Automatic door drop-down seal **Planet KG-F10 | F12 → RD ≤ 48 dB**, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1 or stainless steel satin anodised, to be attached and glued, seal height up to ↓ 18 mm. Lip from silicone. Protection profile and profile made from aluminum → 16,5 x 46 / 52 mm, incl. cover plate on lock side for single leaf doors.

## Advertising text



### Planet KG-F10 | F12 → FH+RD (fire-retardant + smoke-shielding) ≤ 48 dB

Automatic door drop-down seal **Planet KG-F10 | F12 → FH+RD ≤ 48 dB**, appropriate for fire-retardant and smoke-shielding doors, sound absorption value SK 1-3, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1 or stainless steel satin anodised, to be attached and glued, seal height up to ↓ 18 mm. Lip from silicone. Protection profile and profile made from aluminum → 16,5 x 46 / 52 mm, incl. cover plate on lock side for single leaf doors.