


Planet KG-S narrow

→ 11,5 x 38 mm | ↓ 16mm | ≤ 48 dB



Main features

- Seal height up to ↓ 16 mm
- Acoustic insulation up to ≤ 48 dB in case of an optimal sealing
- Planet KG-S narrow laterally pasted with UV cement or double adhesive tape
- Unilateral and soundless release, silent seal
- Due to parallel drop-down no trailing on the floor
- Automatic compensation at inclined floors
- High-grade silicone lip, simple lift height adjustment
- Can be shortened up to the next shorter length on stock
- 7 years warranty

Versions / options

- Planet KG-S narrow → RD ≤ 48 dB, smoke-shielding
- Planet KG-S narrow → FH+RD ≤ 48 dB, fire-retardant + smoke-shielding
- Option bevel lip ≤ 44 dB, up to ↓ 20 mm, for uneven floors
- Special versions on request

Surfaces

- Protection profile silver anodised EV1
- Protection profile stainless steel satin anodised
- Protection profile black C35 satin anodised **NEW**

Door types with Planet KG-S narrow




More functions



Technical specifications

Profile material	aluminum, → 11,5x38 mm, silver anodised EV1, stainless steel satin or black C35 satin anodised
Seal profile	high-grade silicone or high-grade self-extinguishing silicone
Seal height	up to ↓ 16 mm
Sound absorption value	up to ≤ 48 dB at 7 mm space to the floor; up to ≤ 47 dB at 14 mm space to the floor
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths in stock	459, 584, 709, 834, 959, 1084, 1209, 1334, 1459 mm
Special lengths	on request up to 6000 mm, sliding doors up to 1600 mm
Release	unilaterally on hinge side
Can be shortened	up to the maximum of 125 mm
Fastening	to be pasted
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

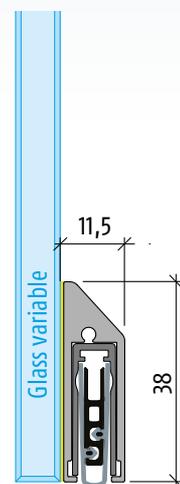

Seal height up to 16 mm





Planet KG-S narrow, pasted laterally on glass door, release side



Planet KG-S narrow, black C35 satin anodised



Option: Planet KG-S narrow, bevel lip for uneven floors



Planet KG-S narrow, with screw for Quick install



Option: Planet KG-S narrow, laterally pasted on wooden door



Option: Planet KG-S narrow, laterally pasted on metal door



Option: Planet KG-S narrow, laterally pasted on PVC door



Accessories: Planet frame protector, fixing screw for the seal and set of Planet cover plates

Order specifications

Planet KG-S narrow → RD ≤ 48 dB → silver anodised EV1, incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-Ss*
Planet KG-S narrow → FH+RD ≤ 48 dB → silver anodised EV1, incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-Ss*
Planet KG-S narrow → RD ≤ 48 dB → stainless steel satin anodised, incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-SXs*
Planet KG-S narrow → FH+RD ≤ 48 dB → stainless steel satin anodised, incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-SXs*
Planet KG-S narrow → RD ≤ 48 dB → black C35 satin anodised, incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-SBs*
Planet KG-S narrow → FH+RD ≤ 48 dB → black C35 satin anodised, incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-SBs*

* xxx = refer to price list for profile length

Advertising text



Planet KG-S narrow → RD (smoke-shielding) ≤ 48 dB

Automatic door drop-down seal Planet KG-S narrow → RD ≤ 48 dB, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1, stainless steel satin anodised or black C35 satin anodised, pasted laterally on glass door. Seal height up to ↓ 16 mm. Lip from silicone. Protection profile and profile made from aluminum → 11,5 x 38 mm, incl. cover plate on lock side for single leaf doors.

Accessories | Options

Planet frame protector plate type 1 (stainless); possible type 2/3/4/5 → refer to chapter Accessories Options	Prod. code 900014
Cut the Planet to fix dimension	Prod. code 900225
Set of Planet cover plates for KG-S/F8 narrow	Prod. code 900836
Adhesive tape set for Planet KG-S narrow	Prod. code 900837
Sliding door	Prod. code 900908
Bevel lip (≤ 44 dB, up to ↓ 20 mm) DIN L or DIN R	refer to price list, options/supplements



Quick install: with the screw you can fix the seal in no time and the door is immediately ready to use!

Advertising text



Planet KG-S narrow → FH+RD (fire-retardant + smoke-shielding) ≤ 48 dB

Automatic door drop-down seal Planet KG-S narrow → FH+RD ≤ 48 dB, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1, stainless steel satin anodised or black C35 satin anodised, pasted laterally on glass door. Seal height up to ↓ 16 mm. Self-extinguishing silicone lip. Protection profile and profile made from aluminum → 11,5 x 38 mm, incl. cover plate on lock side for single leaf doors.