DOOR MATERIAL

WOOD

METAL

GLASS

BEST

PVC

Planet **KG-MinE-S10**

→ 34 x 45 / 61mm | ↓ 27 mm | ◀≀ 27 dB

Main features

- Especially for passive building and low energy houses
- Closed rooms with ventilation systems / toilet / bathroom
- Air circulation / air equalization
- Seal height up to ↓ **27 mm**
- Acoustic insulation up to ◀≀ **27 dB** in case of an optimal sealing
- For one and double leaf folding all-glass doors, glass thickness from 10 mm
- Air passage 200 m³/h
- Readings **30 m³/h** at a pressure difference of **3,9 Pa** (with door width 1050 mm)
- Planet KG-MinE-S10 to be attached and glued
- For wavy, buckled, hollow, bevelled and uneven floor
- Soft sililcone bevel lip seal, perfect for uneven floors
- No trailing on the floor
- 7 years warranty

Versions / options

- Planet **KG-MinE-S10** ◀≀ **27 dB**
- Special versions on request

Surfaces

- Protection profile **silver anodised EV1**
- Protection profile **stainless steel satin anodised**

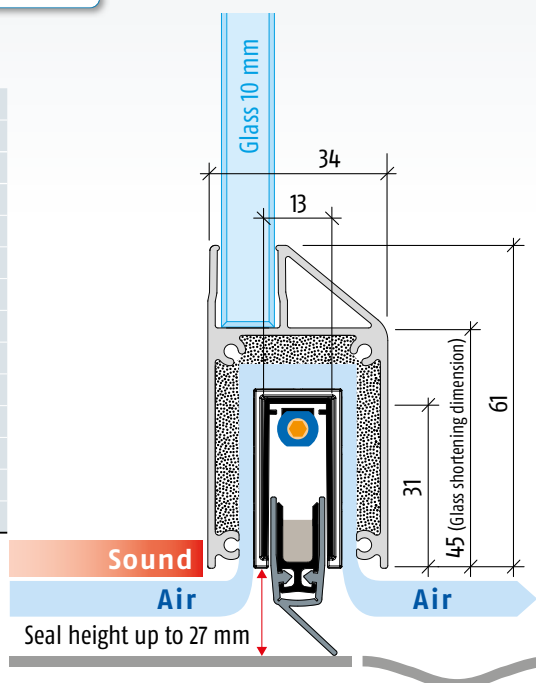## Door types with Planet KG-MinE-S10

More functions

MINERGIE® MEMBER

Technical specifications

Profile material	aluminum, → **13 x 30 mm**
Channel material	aluminum, → **34 x 61 mm**
Seal profile	high-grade silicone or high-grade self-extinguishing silicone
Seal height	up to ↓ **27 mm**
Sound absorption value	up to ◀≀ **27 dB** at 7 mm space to the floor
Luftdurchlass	30 m³/h at an aeration length of 1050 mm and a pressure difference of 3,9 Pa
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths in stock	335, 460, 585, 710, 835, 960, 1085, 1210, 1335, 1460 mm
Special lengths	on request up to 2000 mm, sliding doors up to 1600 mm
Release	unilaterally on hinge side
Can be shortened	up to the maximum of 125 mm (335 mm only 115 mm)
Fastening	to be glued
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

7 YEARS WARRANTY

ift ROSENHEIM

Glass 10 mm

34

13

61

45 (glass shortening dimension)

31

Sound

Air   **Air**

Seal height up to 27 mm

Planet
ASSA ABLOY

Planet KG-MinE-S10, release side

Planet KG-MinE-S10 with channel and insulation

Planet KG-MinE-S10 cover plates

Planet frame protector, type 1

Order specifications

|	
Planet KG MinE-S10 ◄≦ **27 dB** ➜ **silver anodised EV1** incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-MinE-S10 L/R*
Planet KG MinE-S10 ◄≦ **27 dB** ➜ **stainless steel satin anodised** incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-MinE-S10X L/R*

DIN R (left handed)

DIN L (right handed)

* xxx = refer to price list for profile length

Accessories | Options

Planet frame protector plate type 1 (stainless); possible type 2 / 3 / 4 / 5 ➜ refer to chapter Accessories	Options	Prod. code 900014
Cut the Planet to fix dimension	Prod. code 900225

Advertising text

Planet KG-MinE-S10 ◄≦ **27 dB**

Automatic door drop-down seal **Planet KG-MinE-S10** ◄≦ **27 dB** for sound absorption glass doors with an air passage, especially for uneven floors, release on hinge side and automatic compensation at inclined floor, parallel drop-down, seal height up to ↓ **27 mm,** lip from high quality silicone, KG-MinE-S10-channel in silver anodised EV1 or stainless steel satin anodised, to be attached and glued, profiles from aluminum ➜ **13 x 30 mm / 34 x 61 mm,** KG-MinE-S10-channel equipped with sound absorption materials.